


# ELASTOMERIC

## SINGLE COMPONENT SBS RUBBER REINFORCED ASPHALT WATERPROOFING

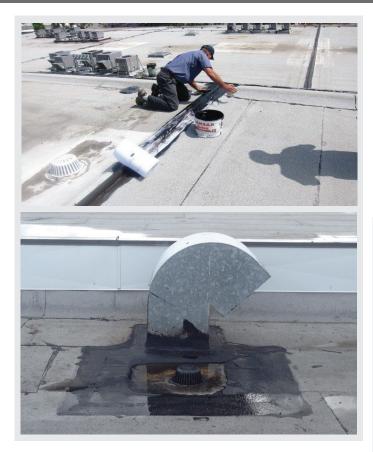

# **Key Benefits...**

- Use on vertical and horizontal applications
- Tough, flexible, elastic, rubber-like film
- Excellent water resistance
- Superior cold temperature flexibility
- One component, needs no intermixing
- UV Stable or can be coated
- 500% Elongation



# **Ideal Applications:**

- Modified SBS & APP Repairs
- BUR Repairs
- Metal Seams & Fasteners
- Pitch Pan Sealer
- Vertical Flashings
- Complete Gutter Restorations
- Expansion Joints
- Blister Repairs



# ELASTOMERIC

### THE ANSWER FOR ASPHALT ROOF REPAIR AND RESTORATION

Karnak's #229 AR Elastomeric is a single component, SBS rubber reinforced asphalt which forms an elastomeric roof coating. Karnak #229 AR Elastomeric has excellent elongation properties, good cold weather pliability and excellent water and weather resistance. #229 Trowel grade can be utilized for flashing, edging, expansion joints, pitch pockets, complete internal gutter restorations and other areas where nominal or slight movement is anticipated. #229AR is an ideal product to use on metal roof applications where standard mastics typically fail.









#### **SPECIFICATIONS:**

ASTM D-4586 Type I Elongation: 500%

#### **SURFACE PREPARATION:**

Surfaces to be coated must be clean and free from dirt, dust, grease, and oil. All surfaces must be patched and repaired prior to the application of the coating



Karnak #229 Elastomeric trowel grade may be applied to either vertical or horizontal surfaces using a smooth edge trowel. Coverage amount will vary depending on desired thickness. To achieve a 1/16" thickness apply at the rate of 4 gallons per 100 sq. ft.; 1/8" apply at the rate of 8 gallons per 100 sq. ft.; 1/4" thickness apply in two coats at the rate of 8 gallons per 100 sq. ft. per coat. #229 Can be left exposed to the UV or coated with Aluminum or Acrylic Roof coatings after full cure.

